

CIRCULAR PERM. MAGNETIC CHUCK TYPE MPF2


REF 11.05

{ERREUR : balise [PRESTATION_CRITERE_ASOUST] inconnue}

Stabil top plate / Rugged construction / Power adjustable / Waterproof construction / Force : : 120 N/cm² / Longer life / Low magnetic field

Grinding, EDM, Control, Laser welding

- . Circular magnetic chuck with NEODYMIUM magnets
- . Low magnetic field
- . Fine pole pitch
- . Suitable for small and thin workpieces
- . Specially designed for high precision applications
- . Magnetic holding power adjustable from 0 to 100%

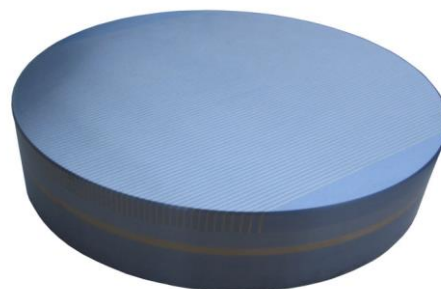

Nominal force : 120 N/cm²
Admissible wear of top plate : 5 mm
Magnetic field height : 4 mm

Options

- Mounting flange
- Concentric grooves for easy centering workpieces
- Any other machining on the top or base plate
- Palettizing systems: ITS-100 EROWA
- Auxiliary top plate
- Special design for laser welding
- Palettizing system in the base plate: EROWA-3R-HIRSCHMANN-V&B ...

Reference	Poids en kg	A	B	C	D	E	F
11.05.100	2.5	100	50	85	60	4	(4x)M8
11.05.130	5	130	50	115	90	4	(4x)M8
11.05.150	6.5	150	50	132	110	4	(4x)M8
11.05.200	12	200	52	180	160	4	(4x)M10
11.05.250	19	250	52	230	200	4	(4x)M10
11.05.300	28	300	54	280	250	4	(4x)M10

