

Auxiliary top plate type PP/MR

REF 14.05

{ERREUR : balise [PRESTATION_CRITERE_ASOUST] inconnue}

Stabil top plate / Rugged construction



Grinding, Turning

. To use with circular magnetic chuck model ERCA/ERCN
. Rugged construction welded with epoxy
Laminated blocks do not have a magnetic field of their own, but are able to transmit the magnetic flux of the chuck towards the workpiece, by positioning them with the laminations being parallel to those of the chuck pole plate. They are used to protect the pole plate when carrying out difficult machining operations.

Options

Any other dimensions, on request

Special machining

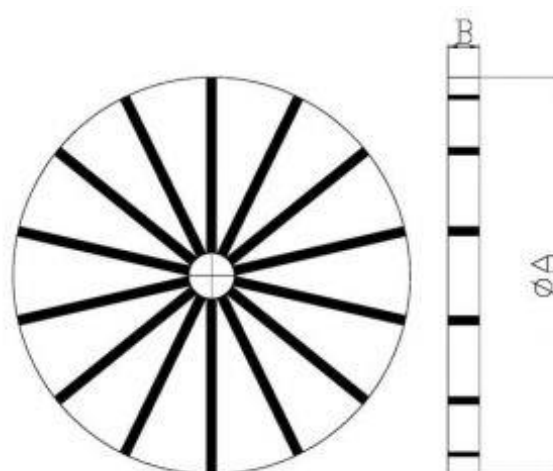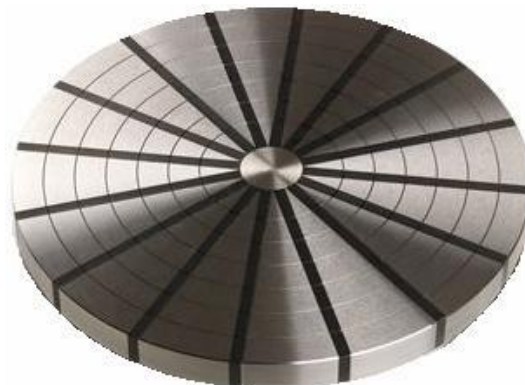

Reference	Poids en kg	A	B
14.05.150.ERCA	1	150	20
14.05.180.ERCA	2	180	20
14.05.200.ERCA	3	200	20
14.05.250.ERCA	4	250	20
14.05.300.ERCA	5	300	20
14.05.350.ERCA	6	350	20
14.05.400.ERCA	7	400	20
14.05.450.ERCA	8	450	20
14.05.500.ERCA	10	500	20
14.05.130.ERCN	2	130	20
14.05.150.ERCN	3	150	20
14.05.200.ERCN	4	200	20
14.05.250.ERCN	5	250	20
14.05.300.ERCN	7	300	20
14.05.350.ERCN	10	350	20
14.05.400.ERCN	15	400	20
14.05.500.ERCN	10	500	20
14.05.600.ERCN	25	600	20