

Permanent magnetic palett for spark erosion type PMA/SPARK

REF 40.60.01

{ERREUR : balise [PRESTATION_CRITERE_ASoust] inconnue}

High holding power / Stabil top plate / Rugged construction / Power adjustable / Waterproof construction / Force: : 100 N/CM² / Longer life

Grinding, EDM, Control

- . Permanent magnetic chuck with NEODYNIUM magnets
- . Parallel fine pole pitch steel + brass
- . Without special adaptation

Nominal force : 100 N/cm²


Admissible wear of top plate : 5 mm

Magnetic field height : 3 mm

Options

All the BMS palett can be deliver in simple version (without special machining) or for palettizing system: EROWA-3R-HIRSCHMANN-V&B ...

A BMS specialist will inform you.

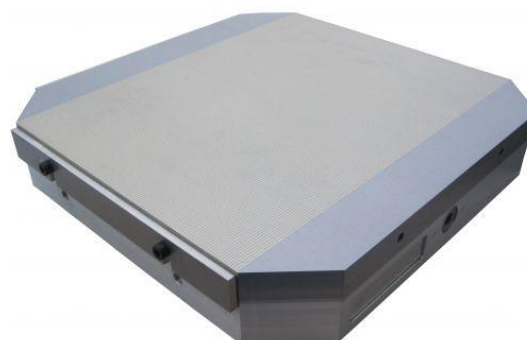

Reference	Poids en kg	A	B	C
40.60.01.150150	8	150	150	45
40.60.01.250150	13	250	150	45
40.60.01.240240	20	240	240	58
40.60.01.320320	32	320	320	58

